


P1: M-113A

P2:

M-Y113A

M-113A

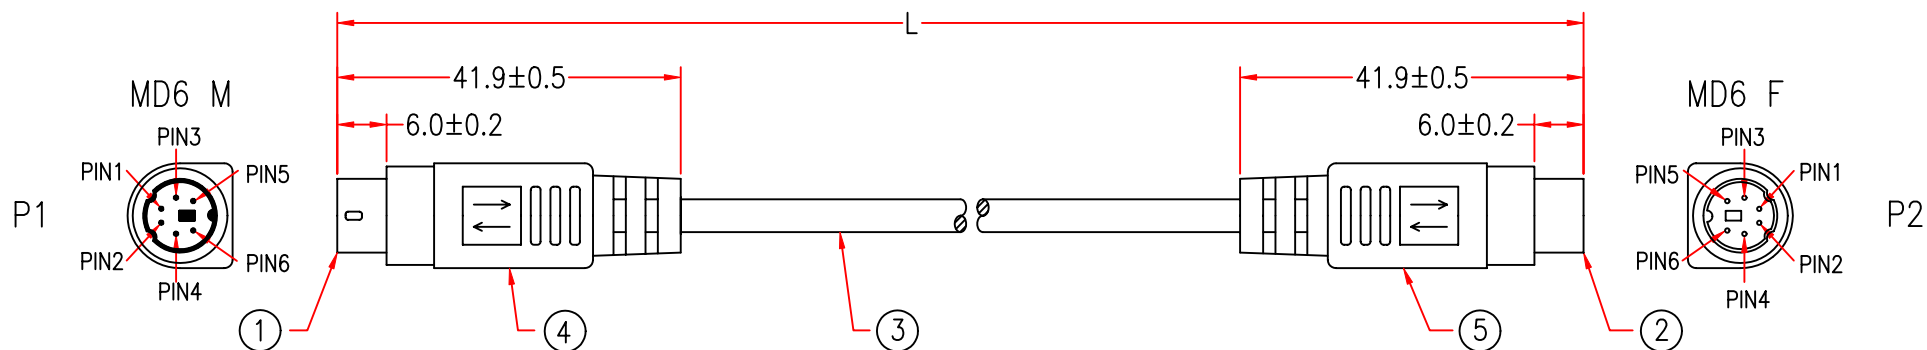

1032		
P1		P2
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
SHIELD	_____	SHIELD

5	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BEIGE		M304
4	MOLDED PVC BEIGE		M304
3	NON-UL 6C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 4.0mm, JACKET BEIGE, DRAWING No. EMAL2806C-033	L	M304
2	MINI DIN 6 FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	1	M108
1	MINI DIN 6 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	1	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED		<b>PCCABLES.COM</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED			
DRAWING			

DATE	14/MAR/05	ITEM NO.	<del>1125</del>	UNIT:mm	
------	-----------	----------	-----------------	---------	--

CHECKED