


P1: M-113A

Customer No: No.1

P2: M-Y113A  
M-113A

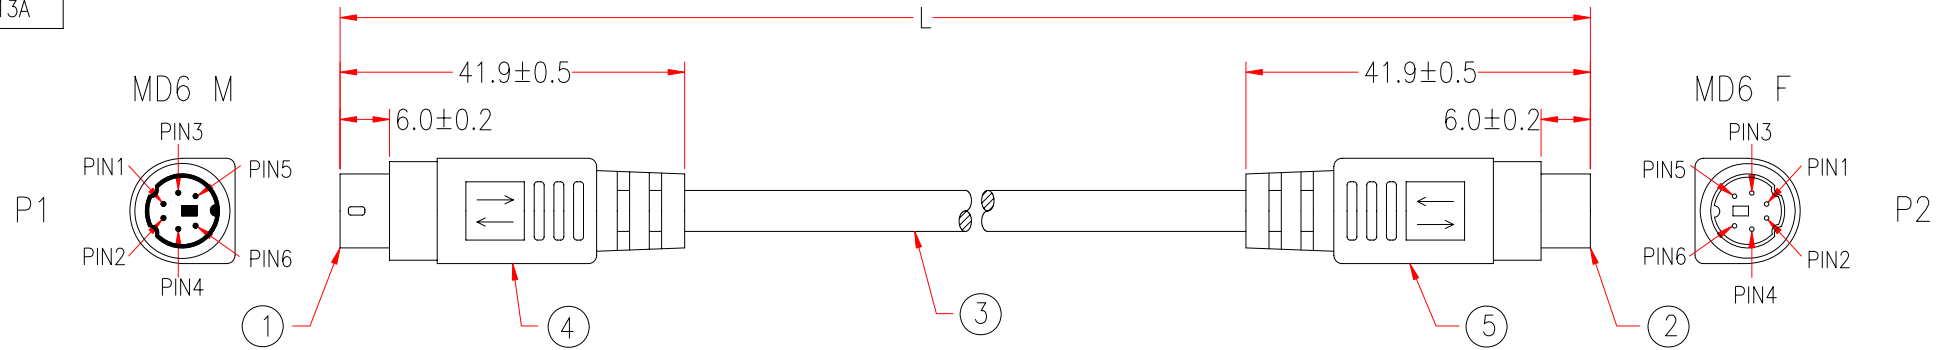

ITEM NO.	length (L)	length (X)
00731	915mm	895mm
00702	1830mm	1810mm
00712	3048mm	3030mm
00716	4570mm	4550mm
00718	7620mm	7600mm
00722	15240mm	15220mm

\* NOTE: All relevant materials are complied with RoHS directive .

1032	
P1	P2
1	1 BROWN
2	2 RED
3	3 ORANGE
4	4 YELLOW
5	5 GREEN
6	6 BLACK
SHIELD	SHIELD

5	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	MOLDED PVC BEIGE	H1BF01-0304B01		M304
3	NON-UL 6C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2806C-034	H5BL21-0304B01	Xmm	M304
2	MINI DIN 6 FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EE03-0108	1	M108
1	MINI DIN 6 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EE16-0108	1Set	M108
No.	DESCRIPTION		Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances:	
CHECKED	HU		0 ~200mm	±10mm
DRAWING	ZHU		201~1000mm	±20mm
			1001 ~1500mm	±25mm
			1501~2100mm	±30mm
			2100mm↑	±40mm
DATE	20/JUN/17	ITEM NO.		UNIT:mm

CHECKED

