


P1,P2: M-Y139C  
M-139C  
P3: M-426E

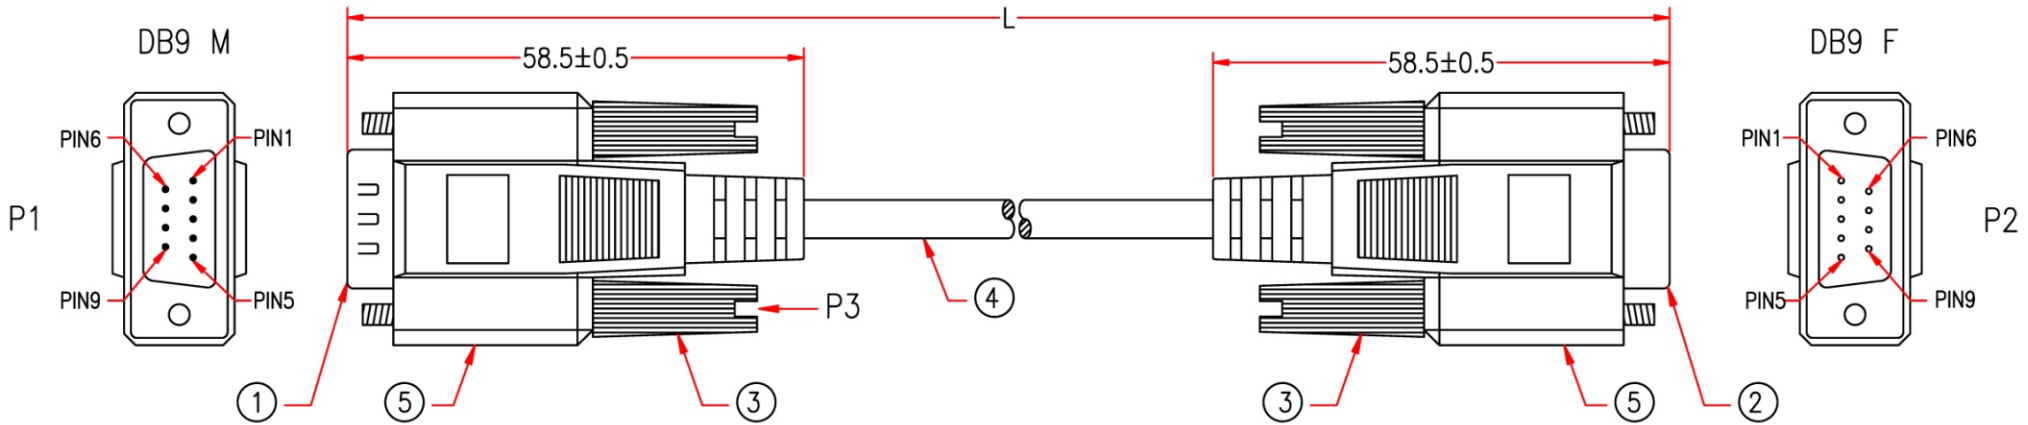

P1	1006	P2	
1	—————	1	BROWN
2	—————	2	RED <span style="color:red">△</span>
3	—————	3	ORANGE
4	—————	4	YELLOW
5	—————	5	GREEN
6	—————	6	BLUE
7	—————	7	PURPLE
8	—————	8	GREY
9	—————	9	BLACK
SHIELD	—————	SHIELD	

\*NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK PVC TUBE $\phi$ 3.0*22mm	2	M304
	ALUMINUM FOIL 33*65mm	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108

APPROVED: 2015.07.13  
 CHECKED: HU  
 DRAWING: ZHU  
 DATE: 13/JUL/15

**PCCABLES.COM**

ITEM NO. **00818**

UNIT:mm

Cable Length Unless Other Spec.  
 Tolerances:  
 0 ~200mm ±10mm  
 201~1000mm ±20mm  
 1001 ~1500mm ±25mm  
 1501~2100mm ±30mm  
 2100mm↑ ±40mm