


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/18/94	H.T.

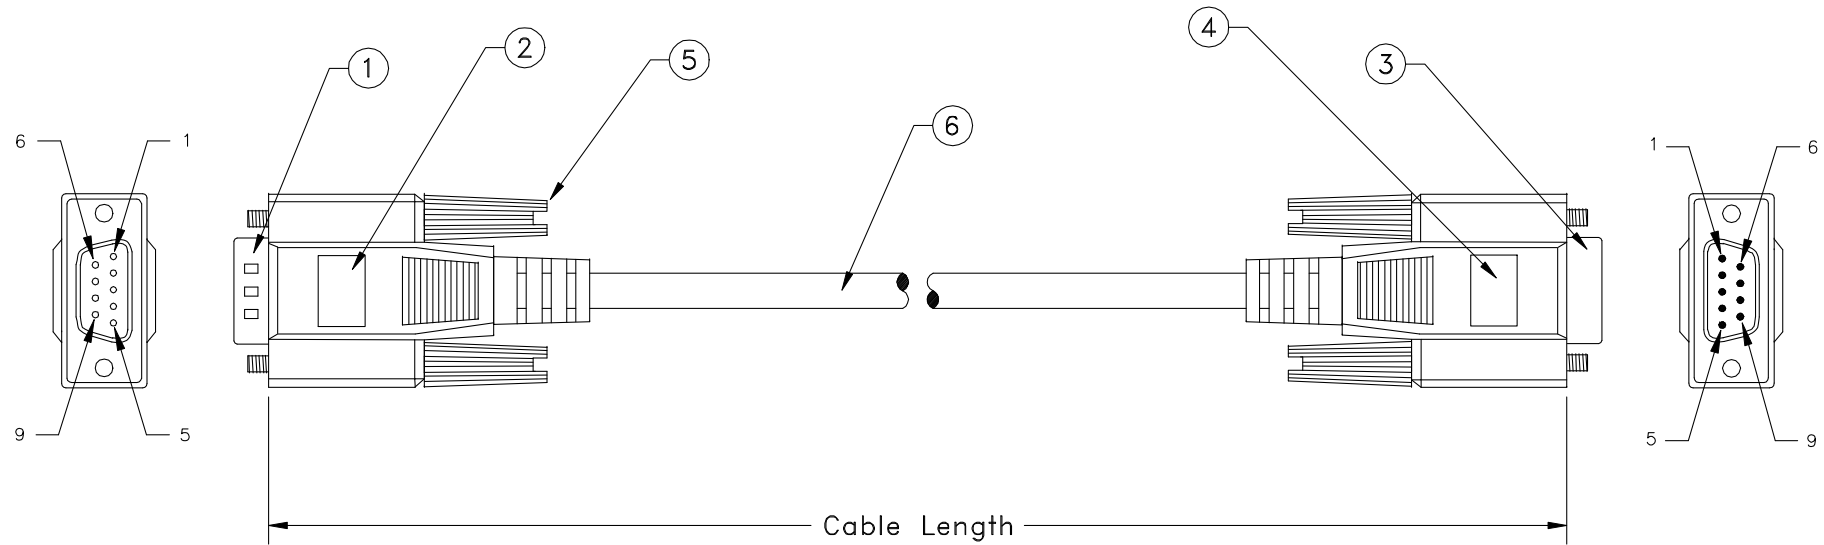

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 9 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Male W/Gold Plating Contacts	1	PCS.
CABLE ASSEMBLY PARTS LIST			

UNLESS OTHERWISE SPECIFIED:
 1. DIMENSION ARE IN INCHS
 2. TOLERANCES:
 DECIMALES X.XX ±0.25
 3. DO NOT SCALE DRAWING
 4. REMOVE ALL BURRS AND
 BREAK SHARP EDGES.

PROPRIETARY DOCUMENT
 THIS DRAWING AND/OR INFORMATION OR
 SUBJECT MATTER CONTAINED HEREIN,
 SHALL NOT BE USED, COPIED OR
 DISSEMINATED IN ANY MANNER, OR FOR
 ANY PURPOSE, OTHER THAN AS
 EXPRESSLY STATED BY
POCABLES.COM INC

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
CHECKED	05/18/94
CUSTOMER APPROVAL	

TITLE DB9 Molded Extension Cable Assembly (DB9, M/F, 1:1, Straight Through)			
SIZE	DWG NO.	PART NO.	REV.
SCALE: NONE	RELEASE DATE: 05/18/94	SHEET: 1 OF 1	A