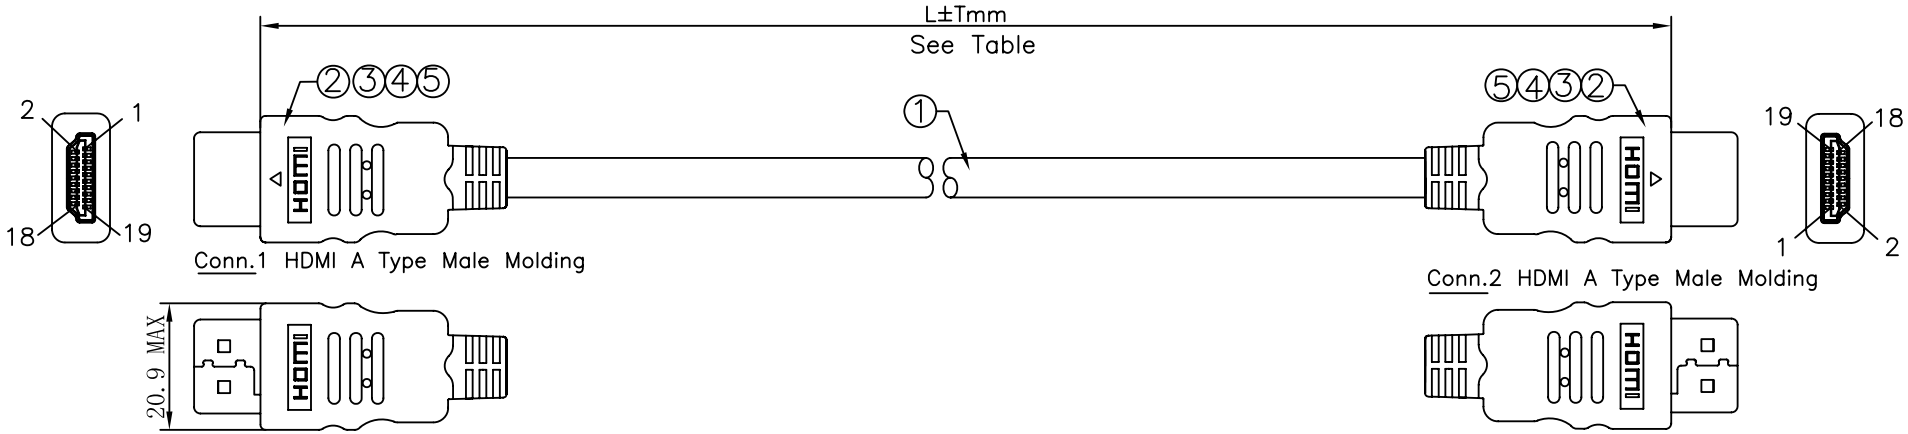

Electrical Test:

1. 100%Test(Open, short, miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:100V DC/10ms

Pin Assignment

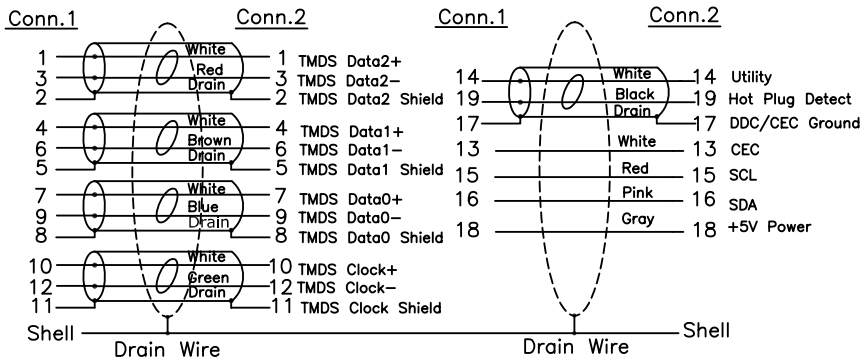

NO.	DESCRIPTION	Q'TY	UNIT
⑤	HDMI 19P Male tinplate	2	pcs
④	Outside Molding: 45P PVC, Black	20	g
③	Inside Molding: PE	3	g
②	HDMI 19P Male, Pin Gold Planted, Shell Gold Flash, Insulation: Black	2	pcs
①	High Speed HDMI Cable with Ethernet Cable: UL20276 [28AWG(7/0.127TC)*1PR +DW(1/0.32CCS)+AL/Mylar]*5P+28AWG(1/0.32CCS)*3C+28AWG(7/0.127TC)+Filler+AL/MY +DW(7/0.127TC)+Braid(16/5/0.12Al/mg)+Jacket OD:7.3±0.2mm Color: Black Cable Printing: HIGH SPEED HDMI® CABLE WITH ETHERNET E342987 AWM STYLE 20276 80℃ 30V VW-1---CM AWM I/II A/B 80℃ 30V FT1	L	M

REV.	DESCRIPTION	DATE

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

TITLE: High Speed HDMI Cable with Ethernet, 28AWG, Gold Flash

DRAWN BY	Hong	CUSTOMER :	
		CUSTOMER NO.:	
CHECK BY		SCALE	NONE
		UNIT	MM
APPD BY		DATE	2017.09.27

DRAWING NO.: 01722-CC

REV. A

1/1