


Part No	L=Length (ft)	L=Length (mm)	Tolerance
02710	10 Feet	3048mm	+ - 40mm
02707	7 Feet	2133.6mm	+ - 40mm
02705	5 Feet	1524mm	+ - 30mm

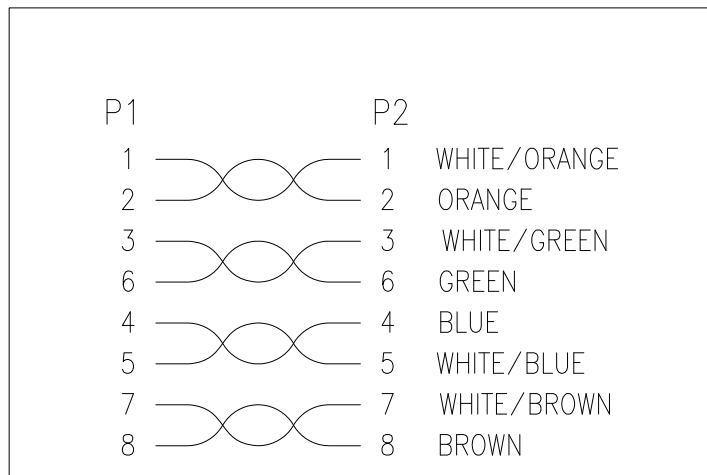

* NOTE: All relevant materials are complied with RoHS directive .

3	MOLDED PVC BEIGE		M304
2	4 TWISD PAIRS CAT.5E 24AWG(7/0.19AS) UTP, OD 5.3mm, JACKET BEIGE, DRAWING No. EU002404P-174		M304
1	8P8C MODULAR PLUG, GOLD PLATING 50u" ON CONTACTS, SHORT TYPE	2	M205
No.	DESCRIPTION	Q'TY	Supplier

APPROVED	jfk	PCCABLES.COM	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	JIANG		
DATE	10/30/2012		
		UNIT:mm	

CHECKED