


P1,P2: M-Y417B  
M-417B  
P3: M-427B

Customer No: \_\_\_\_\_

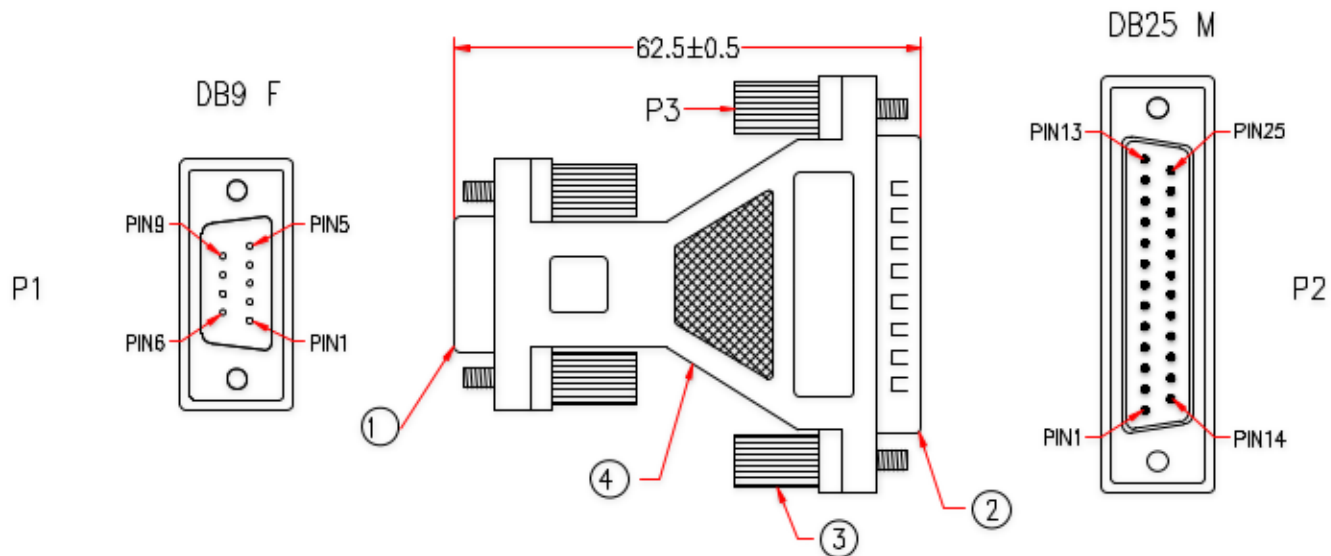

4027		
P1		P2
1	_____	8
2	_____	3
3	_____	2
4	_____	20
5	_____	7
6	_____	6
7	_____	4
8	_____	5
9	_____	22
SHIELD	_____	SHIELD

△ \*NOTE: All relevant materials are complied with RoHS directive .

4	UL1061 26AWG INSULATOR, LENGTH 47mm*9PCS&55mm*1PCS, DRAWING NO. EH0026D1C-013	H5SE06-0304		M304
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
3	MOLDED THUMBSCREW #4-40, LENGTH 21.5mm, BEIGE	H1RB01-0304B01 A6A08-0085	4	M95
2	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE14-0108	1	M108
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA03-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		<b>PCCABLES.COM INC</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm±40mm		
CHECKED	HU				
DRAWING	JIANG				
DATE	12/0CT/11	ITEM NO.	<b>31020</b>	UNIT:mm	