


LTR		REVIS		APPROVED
A		NEW RELEASE		05/12/95

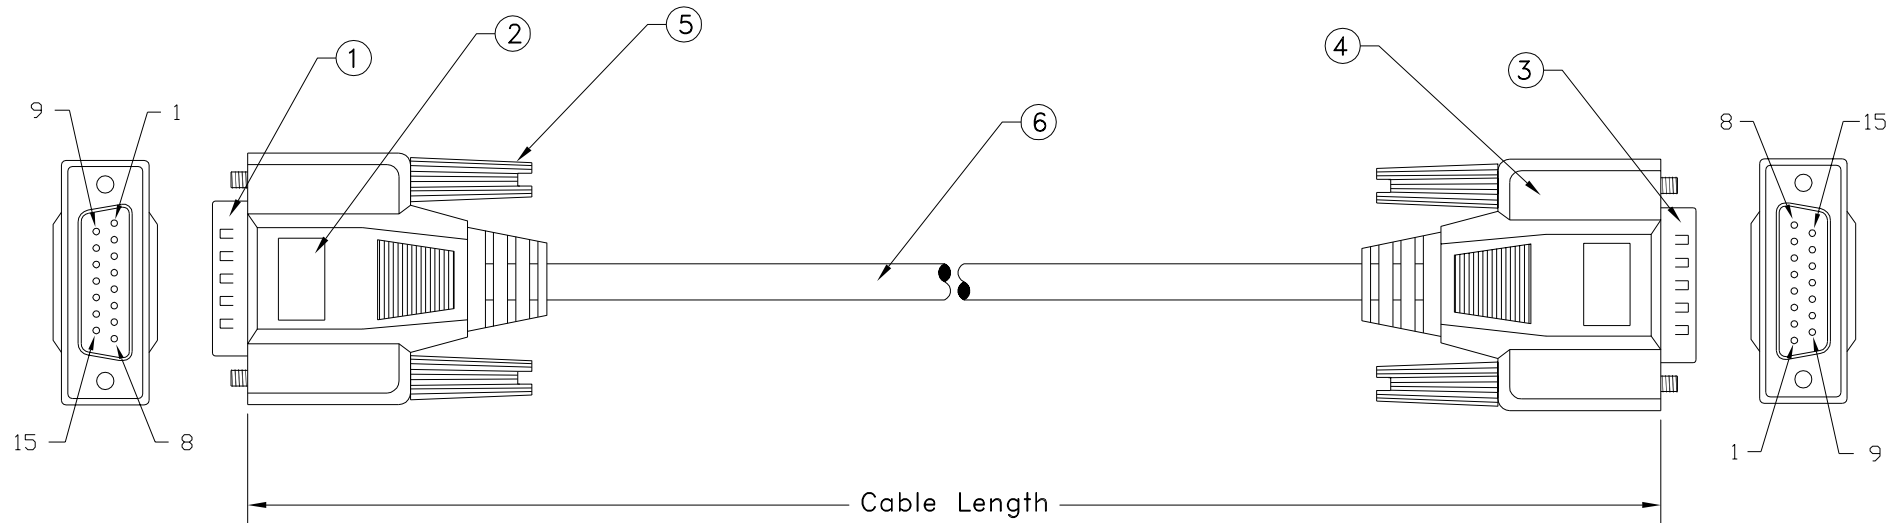

Pin Assignment

DB15 Male	DB15 Male
1	1
2	2
3	3
4	4
5	5
{	}
14	14
15	15
G	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 15 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC Jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 15 Pin Male w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 15 Pin Male W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25	CUSTOMER	PCCABLES.COM INC
	R.F.Q. NO.	
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY	DRAWN JFK DATE	TITLE
	CHECKED	DB15 M/M Molded Cable Assembly
CUSTOMER APPROVAL	DWG NO. 10D2	PART NO. 70004
	RELEASE DATE: 05/12/95	REV. A
	SHEET: 1 OF 1	