


DESCRIPTION		CONTROL	
REV	DESC	DATE	APP
A		2004/ 05/ 06	

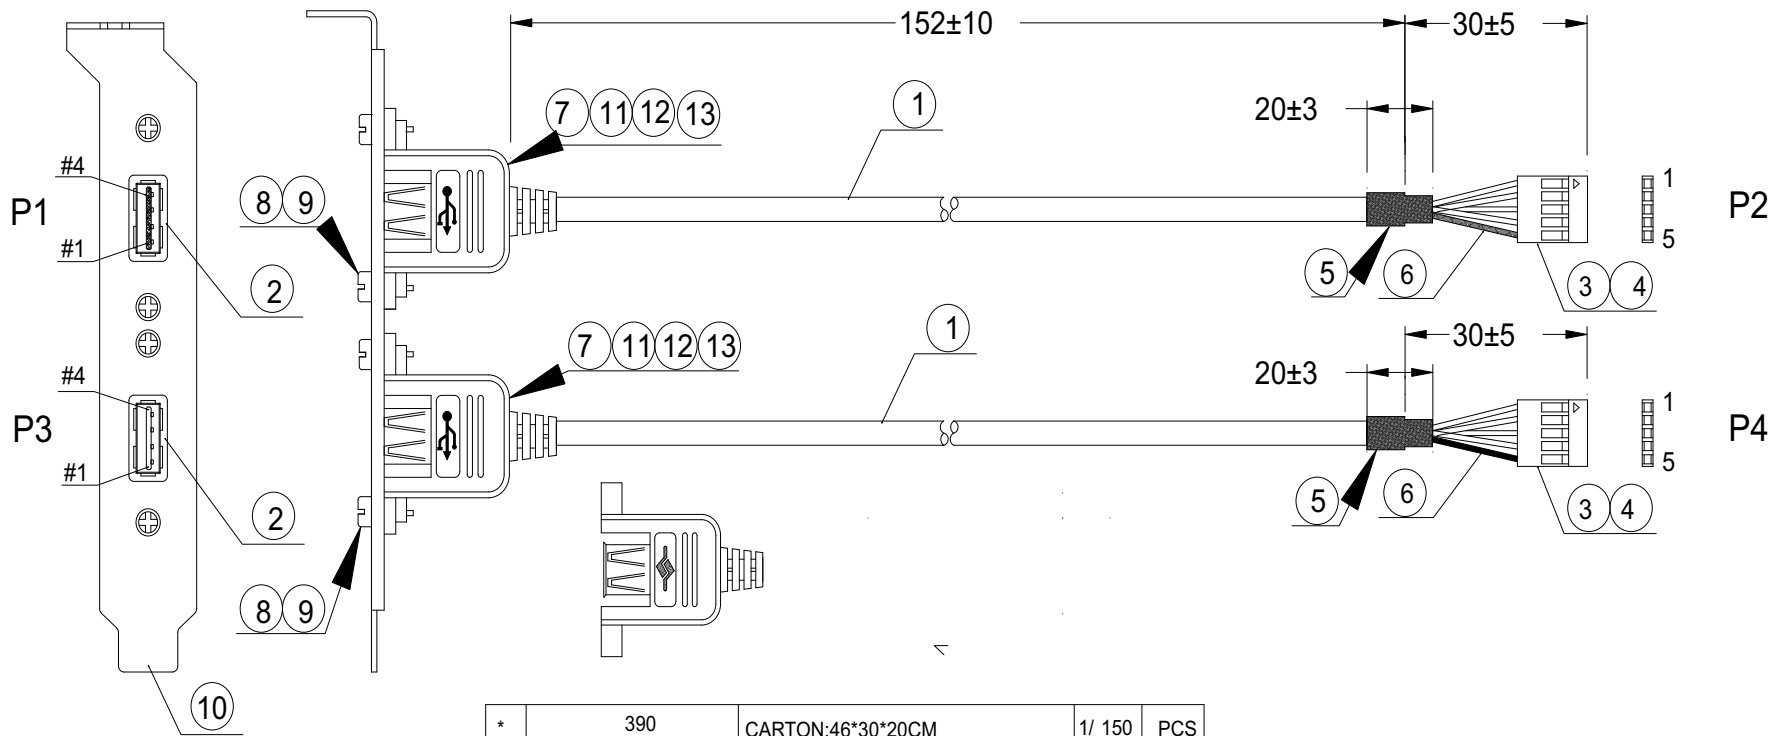

*	390	CARTON:46*30*20CM	1/ 150	PCS
*	390	PE BAG:30**28**0.08MM	1/ 150	PCS
*	390	PE BAG:6**8**0.06MM	1	PCS
*	390		1	PCS
13	370	PVC-BE 47/ 50	19	G
12	370	PVC-IN	9	G
11	220	SOL-WIRE-63/ 37-1.0	0.5	G
10	370		1	PCS
9	370	SRW:5.3*8.9MM<4#-40#>	4	PCS
8	370	NUTS:H4.75*3.0MM<4#-40#>	4	PCS
7	210	TUBE-HT-Ø1.0*8MM	2	PCS
6	210	TUBE-HT-Ø1.0*25MM	2	PCS
5	210	TUBE-HT-Ø5.0*20MM	2	PCS
4	230	HOUSING:JS-2541-H-05P<BK>	2	PCS
3	230	TERMINAL:JS-2541-T<TIN>	10	PCS
2	220	USB-A-S<WH>	2	PCS
1	210	28/ 24-1P/ 2C+A+D+B-BE47 -0.4M-4.8U2725	1/ 2*2	PCS
NO	PART NO	DESCRIPTION	QTY	UNIT

NOTE:

1.CABLE COLOR:BEIGE 47#

2.ELECTRICAL TESTING

a.OPEN/SHORT/INTERMITTEN 100% TESTING LINE-PROCESS


b.HI-POT 250V AC/0.5S

c. RESISTANCE 10MOhm INSULATION (MIN) 250V DC.


d.CONTACT RESISTANCE 5 Ohm (MAX)

PIN ASSIGNMENT


P1

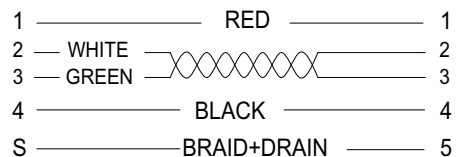



P2



P3

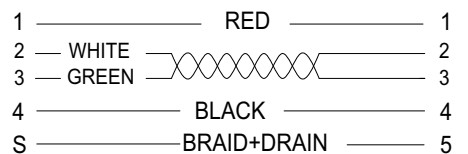

P4



ITEM:

70501

REV

A

DRAW,BY: AIMEE

SCALE: NONE

DATE: 2004/ 05/ 06

CHECK,BY:

CUSTOMER:A01

APP,BY:

CUSTOMER P/

ALL DIMENSIONS IN mm