

P1: DB9P

P2: MD8P Male

1. Electrical test:


- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE: DC 250V 1MOHM Min;
- (3). CONTACTOR RESISTANCE: 1.5 K Ω M Max;

2. FINISHED PRODUCTS LENGTH:
PCC70810 6FT LENGTH=1829 \pm 25.4mm

PIN OUT

P1:DB9P F P2:MD8P M

- 1 BLACK 1
- 2 BROWN 3
- 3 RED 5
- 5 ORANGE 4
- 7 YELLOW 8
- SHELL DRAIN 2
- SHELL SHELL

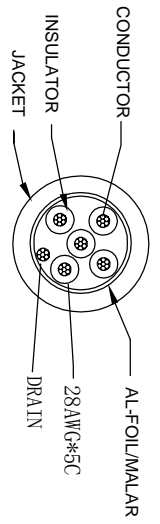

4	THUMBSCREW: 4*47mm MALE, NICKEL-PLATING, BOOT COLOR:Platinum gray	2PCS	
3	CONNECTOR: DB9PIN FEMALE, Rubber core COLOR:Black, NICKEL-PLATING, BOOT COLOR:Platinum gray	1PCS	
2	CONNECTOR: MD8P MALE, Rubber core COLOR:Black, NICKEL-PLATING, BOOT COLOR:Platinum gray	1PCS	
1	CABLE: UL2464 28AWG*5C JACKET: PVC45P OD: 4.0 \pm 0.15mm. COLOR:Platinum gray	1PCS	
NO	PART NAMES	QTY	REMARK

Change Details

NAME	DB9P FEMALE-MD8P MALE	CUSTOMER	PCC	DRAWN	XuShengCai
CUS	PCC70810	VERSION	1	CHECKED	
DR, NO		DRAWN DATE	2012. 10. 22	APPROVERD	