


NOTES:
 1. CABLE: [(25AWG(7/0.18)*IP+DW*25AWG(7/0.18)+AL/MY+MY]*2C
 +22AWG(7/0.254)*2C+MY+AL/MY+BD(24/9/0.12)}TTN
 INSULATION(25AWG):FM-PE,OD=Ø1.62±0.10mm
 COLOR:RED&GREEN,BLUE&ORANGE
 INSULATION(22AWG):SR-PVC,OD=Ø1.3±0.05mm
 COLOR:WHITE&BLACK
 JACKET:HALF MATT PVC OD=7.0±0.15mm
 COLOR:TRANSPARENT

PIN OUTS	
1394 9PM	1394 9PM
WIRE COLOR	
1 RED	3
2 GREEN	4
3 BLUE	1
4 ORANGE	2
5 BLUE/ORANGE INNER BRAID	9
6 WHITE	6
8 BLACK	8
9 RED/GREEN INNER BRAID	5
Shell	Shell

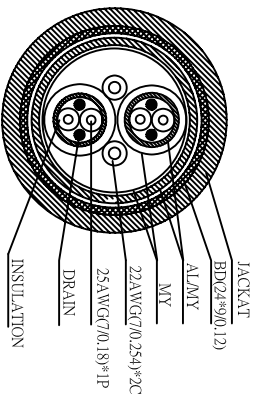

TEST CONDITION	LOW-VOLTAGE	15V	
INSULATION	UPON 1M ohm	ELECTRIC CONDUCTION:INSIDE 1.5K ohm	
1	CABLE:IEE1394 2P+2C OD=7.0mm	COLOR:TRANSPARENT	
2	CONNECTOR:1394 9P M.PIN;G/F SHELL:GOLD-PLATING;INSULATOR COLOR:BLACK		
ITEM NO	DESCRIPTION	Q'TY	REMARK

PRODUCT	1394 9PIN M/M	CUSTOMER	PCCABLES	DRAWN	Z.Q.H	THREE ANGLE PROJECTION
CUS,NO	70990(PCC70990)	VERSION	1	CHECKED		
DR,NO		DRAWN DATE	2008.12.08	APPROVERD		