



REVISIONS		
REV	DESCRIPTION	APPROVED

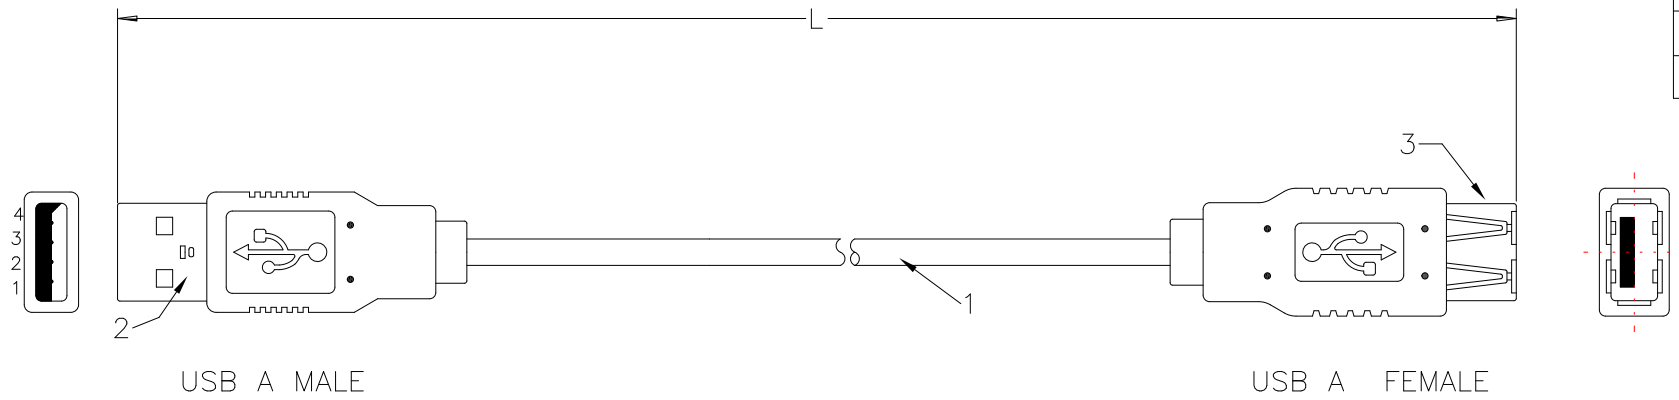

NOTES:

- MOLDED CONNECTOR END REQUIREMENTS:
A:PVC -45P PANTONE BLACK
- CABLE: [24AWG(7/0.203)*1P+20AWG(7/0.320)*2C +AL/MY+DW(7/0.127)+65%BD(16/5/0.1)]TIN
INSULATION WIRE ONE: FO-SKIN, OD= ϕ 1.10 \pm 0.05mm COLOR: WHITE&GREEN
INSULATION WIRE TWO: SR-PVC, OD= ϕ 1.40 \pm 0.05mm COLOR: BLACK,RED
JACKET:80°C 80P PVC OD=5.80 \pm 0.15mm
COLOR: BLACK
MARKING:2725 (UL# TBD) 9JAWM 80°C 30V VW-1
USB 2.0 RoHS Compliant
- FINISHED PRODUCTS LENGTH:

PIN OUTS		
USB AM	WIRE COLOR	USB AF
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL		SHELL

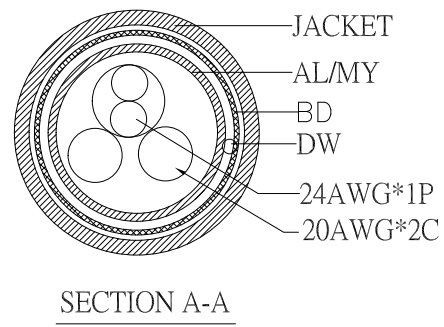

ITEM NO	PART NAMES	Q'TY	REMARK
3	CONNECTOR: USB A FEMALE SHELL PLATING WITH GOLD PIN PLATING: GOLD, INSULATOR COLOR:WHITE	1PCS	
2	CONNECTOR: USB A MALE SHELL PLATING WITH GOLD PIN PLATING: GOLD, INSULATOR COLOR:WHITE	1PCS	
1	CABLE: USB(2.0) 24AWG*1P+20AWG*2C OD=5.8 \pm 0.15mm	1PCS	

PRODUCT	USB A MALE TO USB A MALE (2.0)	CUSTOMER		DRAWN	H.J.X
CUS,NO		VERSION		CHECKED	Jackson L
DR,NO		DRAWN DATE	10.Jan.06	APPROVERD	Jacky Lin

