P1,P2: M-113A

Custoner P/N:

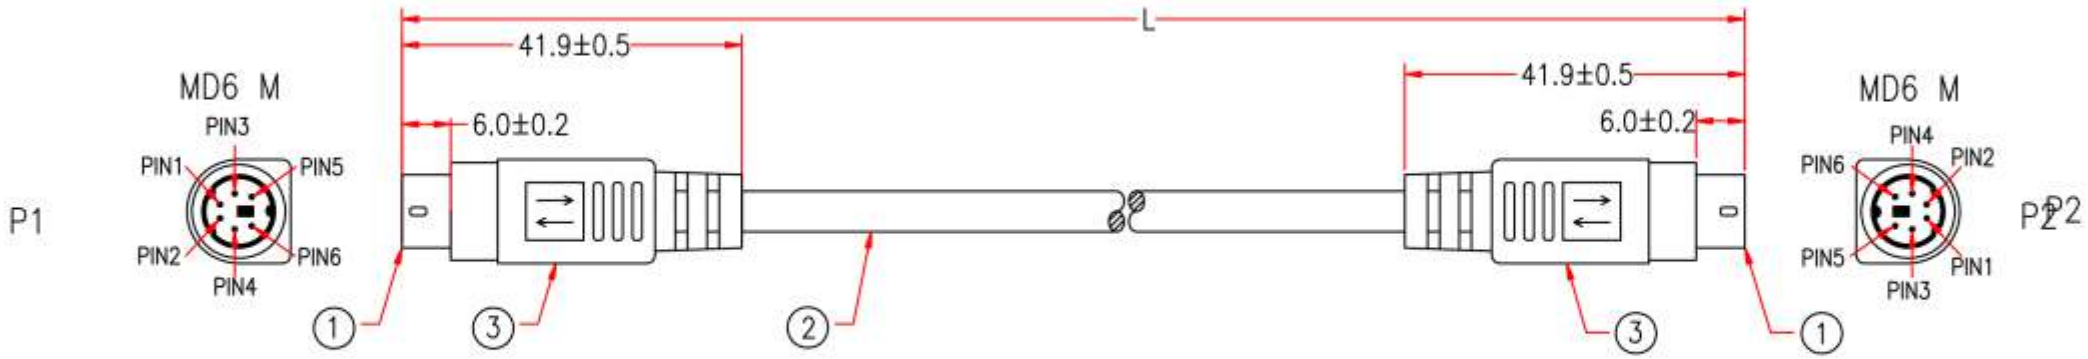

1028

P1		P2	
1	———	1	BROWN
2	———	2	RED
3	———	3	ORANGE
4	———	4	YELLOW
5	———	5	GREEN
6	———	6	BLACK
SHIELD	———		SHIELD

*NOTE: All relevant materials are complied with RoHS directive .1

No.	DESCRIPTION		Q'TY	Supplier
3	MOLDED PVC BEIGE	H1BF01-0304B01		M304
2	NON-UL 6C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE OD 4.0mm, JACKET BEIGE, DRAWING No. EMAL2806C-033	H5BL20-0304B01	L-15mm	M304
1	MINI DIN 6 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EE16-0108K09	2	M108

APPROVED	JFK	PCCABLES.COM 3035 NE 19th Dr Gainesville, Fl 32609	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU			
DRAWING	ZHU			
DATE	11/JULY/19	ITEM NO. PCC-00714	UNIT:mm	

1 REV.1 2019.07.11 | MODIFY PRODUCT NO | CHECKED | Jack