


P1,P2:	M-Y139C
	M-139C
P3:	M-426E

Customer No: No:1

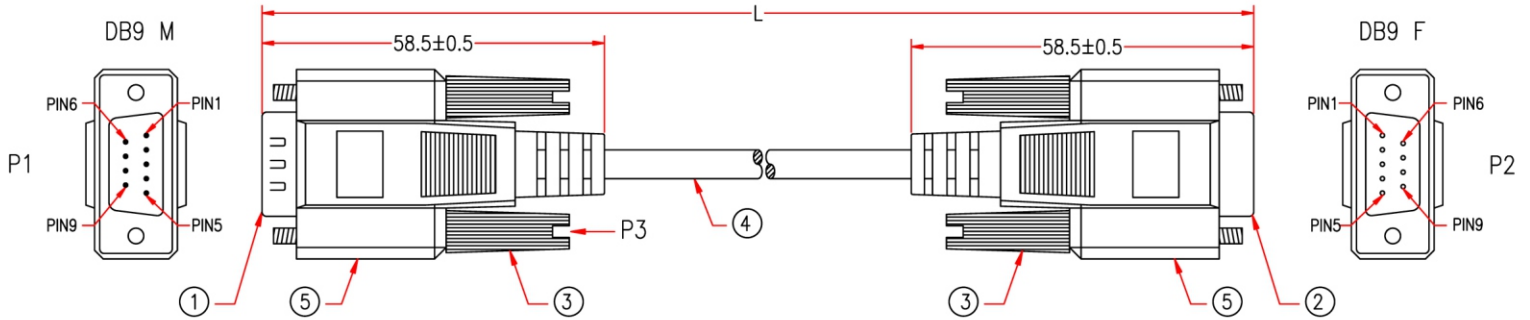

P1	1006	P2	
1	—————	1	BROWN
2	—————	2	RED
3	—————	3	ORANGE
4	—————	4	YELLOW
5	—————	5	GREEN
6	—————	6	BLUE
7	—————	7	PURPLE
8	—————	8	GREY
9	—————	9	BLACK
SHIELD	—————	SHIELD	

*NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	A4HA10-0959	2 M304
	ALUMINUM FOIL 33*65mm	A6MA05-0579	2 M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280	M280
	MOLDED PVC BEIGE	H1BF01-0304B01	M304
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051	H5BL31-0304B01	L-20mm M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	A6AA30-0095	4 M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA03-0108	1 M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA17-0108	1 M108

APPROVED	2015.07.13	PCCABLES.COM INC.	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm
CHECKED	ZHU		
DRAWING	ZHU		
DATE	13/JUL/15		
ITEM NO.		UNIT:mm	

REV.2 2015.07.13

ADD SPEC

REV.1 2010.09.21

ADD CONDUCTOR COLOR CODE

CHECKED