


P1,P2: M-Y139C  
M-139C  
P3: M-426E

Customer No: No:

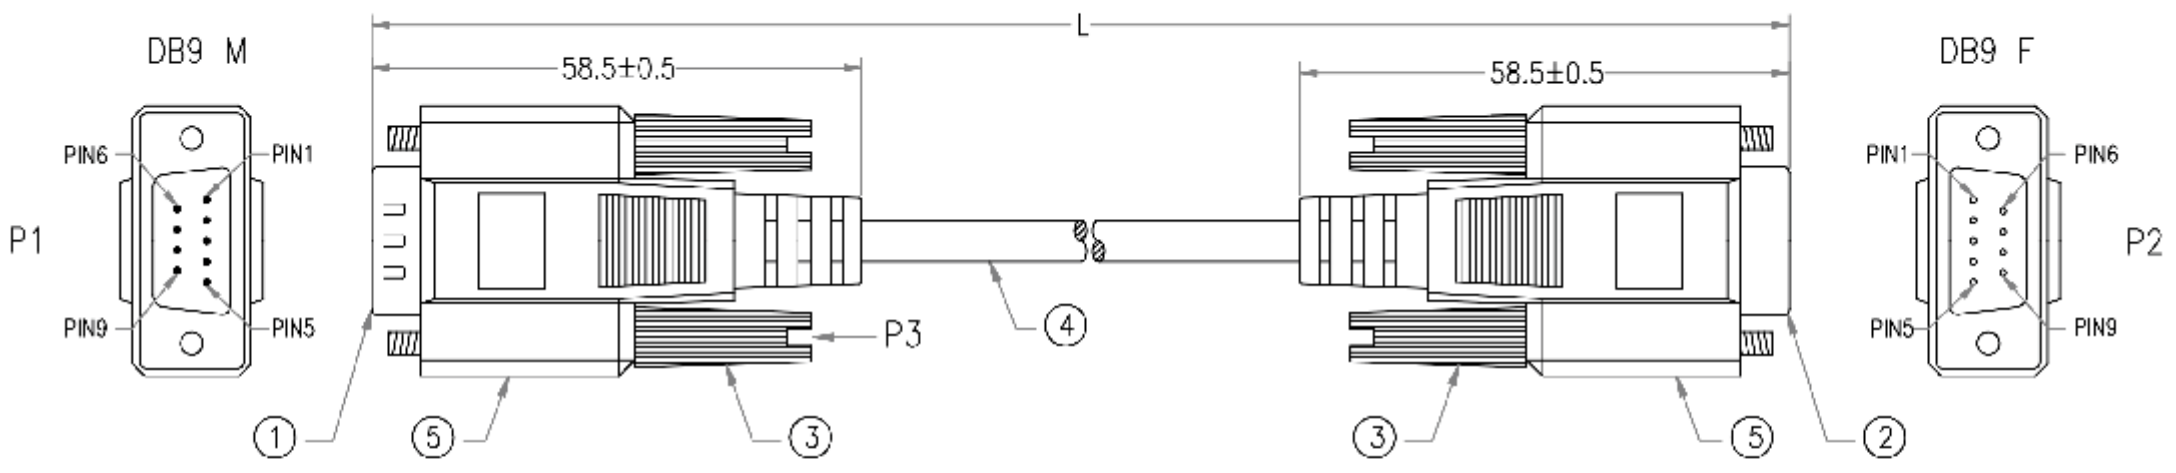

P1	1006	P2	
1	—————	1	BROWN
2	—————	2	RFD <sup>△</sup>
3	—————	3	ORANGE
4	—————	4	YELLOW
5	—————	5	GREEN
6	—————	6	BLUE
7	—————	7	PURPLE
8	—————	8	GREY
9	—————	9	BLACK
SHIELD	—————	SHIELD	

\*NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK PVC TUBE $\phi$ 3.0*22mm	H7A001-0304K09	2 M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	2 M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-C280	M280
	MOLDED PVC BLACK	H1BF01-0304301	M304
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET . . . DRAWING NO. EMAL2809C-051	H5BL31-03048C1	L-20mm M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	H1RB01-0304B01 A6AA30-0035	4 M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA01-0277U09	1 M277
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA12-0277U09	1 M277

APPROVED		PCCABLES.COM INC <a href="https://www.pccables.com/Products/00820">https://www.pccables.com/Products/00820</a>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm =10mm 201~1000mm =20mm 1001 ~1500mm =25mm 1501~2100mm =30mm 2100mm↑ =40mm		
CHECKED	HJ				
DRAWING	ZHU				
DATE	05/JULY/19	ITEM NO.	00820	UNIT:mm	

△REV.2 2015.07.13 ADD SPEC    △ REV.3 2019.07.05 MODIFY PRODUCT NO  
△REV.1 2010.09.21 ADD CONDUCTOR COLOR CODE    CHECKED