


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/12/95	H.T.

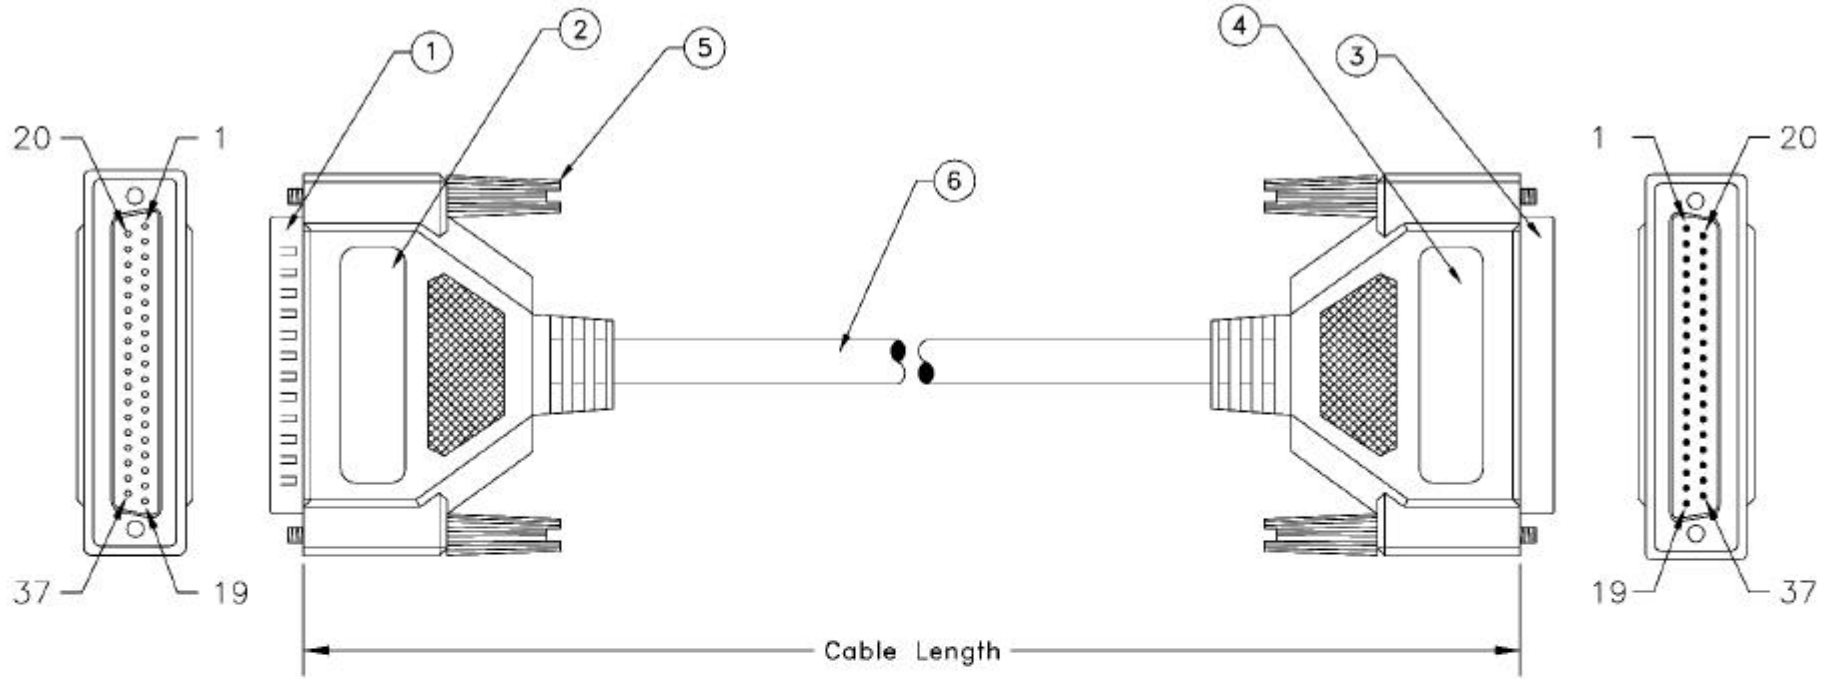

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 37 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 37 Pin Female w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 37 Pin Male W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES- DECIMALS X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.		CUSTOMER
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY		R.F.Q. NO.
DRAWN		DATE
CHECKED		Howie Tseng 05/12/95
CUSTOMER APPROVAL		

PCCABLES.COM INC			
TITLE DB37 Molded Cable Assembly (DB37, M/F, 1:1, Molded)			
SIZE	DWG NO.	PART NO.	REV.
		00836	A
SCALE	NOTE	RELEASE DATE	SHEET
		05/12/95	1 OF 1