


P1: M-348D

P2: M-348C

Customer No.:

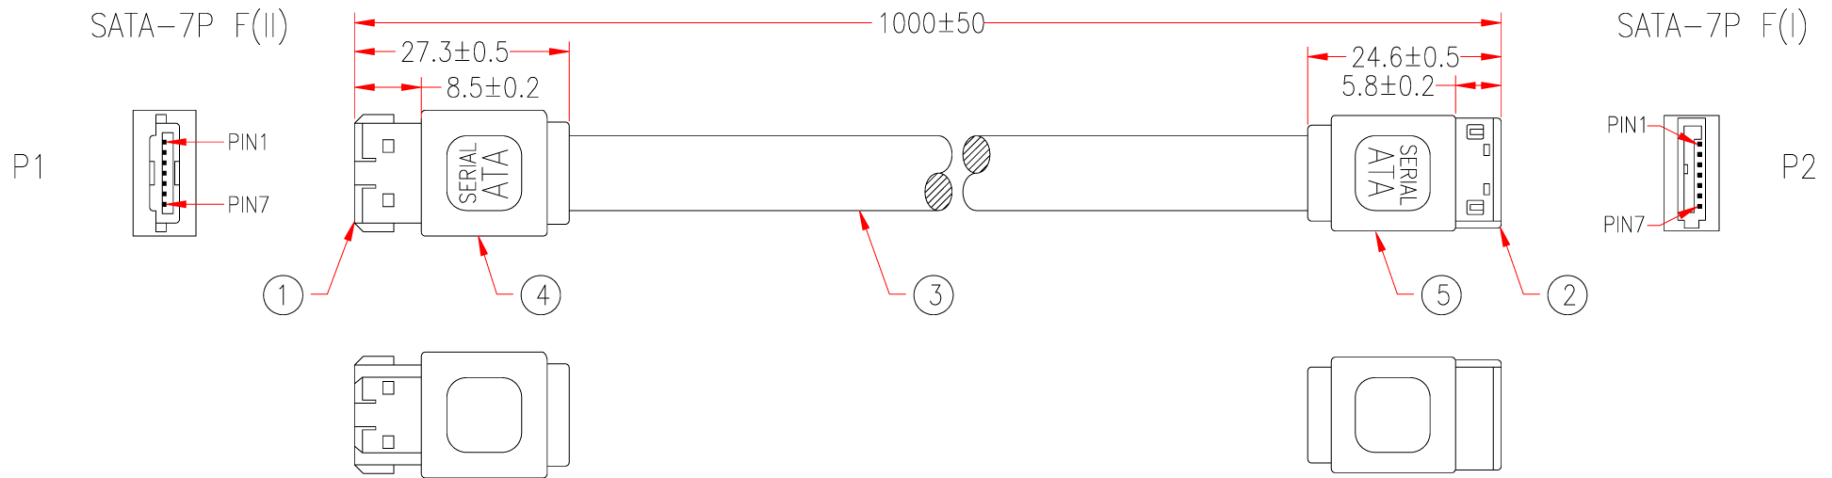

9A04

P1	P2
1	1 SHIELD
2	2 WHITE
3	3 WHITE
4	4 SHIELD
4	4 SHIELD
5	5 WHITE
6	6 WHITE
7	7 SHIELD
SHIELD	SHIELD

5	MOLDED PVC BLACK		M304
4	MOLDED PVC BLACK		M304
3	UL2725 SERIAL ATA EXTERNAL CABLE, (26AWG*2C+AM)*2PCS+3D+PVC+B, OD 3.9*9.3mm, JACKET RED (R525F)	1000mm	M298
2	SATA CONNECTOR, FEMALE 7 PIN WITH METAL CASE, BLACK INSULATOR(FIRST SATA)	1Set	M108
1	SATA CONNECTOR, FEMALE 7 PIN WITH METAL CASE, BLACK INSULATOR(SECOND SATA)	1Set	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	TIAN		
DRAWING	SONG		
DATE	16/SEP/05	ITEM NO.	
		UNIT:mm	

RE.1 2005.09.16 MODIFY CABLE COLOR TYPE FOR 2525F TO R525F

CHECKED