


Conn.1 HDMI Male Molding

Pin Assignment

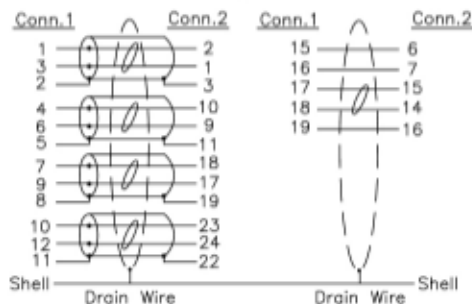

Conn.2 DVI-D 18+1 Male

Electrical Test:

- 1.100%Test(Open, short, miss wire)
- 2.Contact Resistance: 2 ohm max.
- 3.Insulation Resistance: 10M ohm min.
- 4.Hi-pot:100V DC/10ms

NO	DESCRIPTION	Q'TY	UNIT
8	Dust Cover for DVI Connector	1	pcs
7	Dust Cover for HDMI Connector	1	pcs
6	Screw #4-40UNC(2.8*45mm), Nickel plated	2	pcs
5	Outside molding: 45P PVC Color: Black	42	g
4	Inside Molding: PE	8	pcs
3	HDMI A Type Male, Black Insulation, Pin Planted 1u", Shell Gold Plated	1	pcs
2	DVI(18+1) Male, Solder Type, Black Insulation, Pin Planted 1u", Shell Gold Plated	1	pcs
1	HDMI Cable: UL20276 [28AWG(7/0.127TC)*1PR+D.W.+Al/my)*4C 28AWG(7/0.127TC)*1PR+28AWG(7/0.127TC)*5C+Al/my+D.W. +Braid(16/5/0.12 Al/mg)+Jacket OD=7.3±0.2mm Jacket Color: Black	1	pc
NO	DESCRIPTION	Q'TY	UNIT

REV.	TOLERANCE		DESCRIPTION	DATE
	INCHES	M/M		
	.X	.015	PCCABLES.COM	
	.XX	.010		
	.XXX	.005		
DRAWN BY		Ken		TITLE: HDMI M to DVI Male Cable
CHECK BY		SCALE	NONE	DRAWING NO.:
APPD BY		UNIT	MM	
		DATE	08.10.29	1/1