



P1,P2: M-Y938A
M-938A

Customer No: NO.1

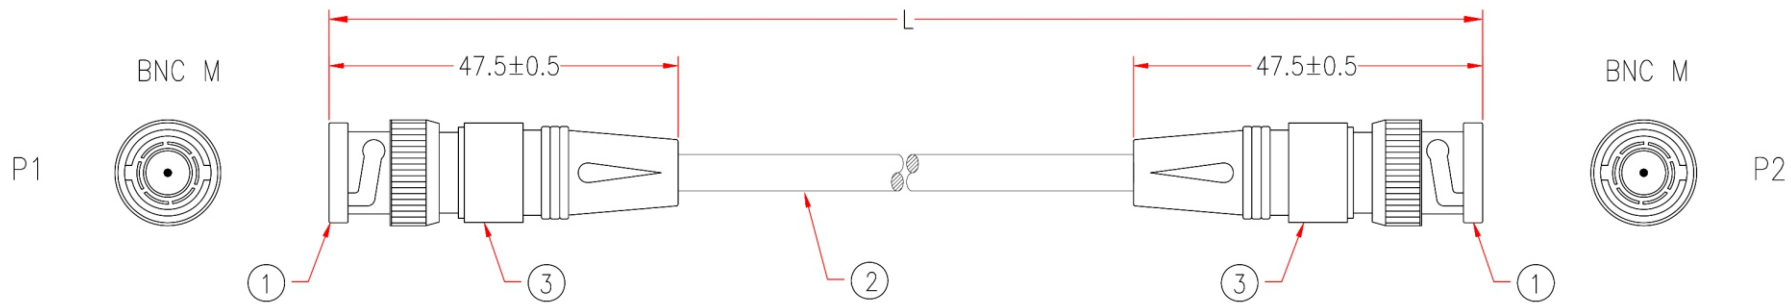

*NOTE: ALL relevant materials complied with RoHS directive

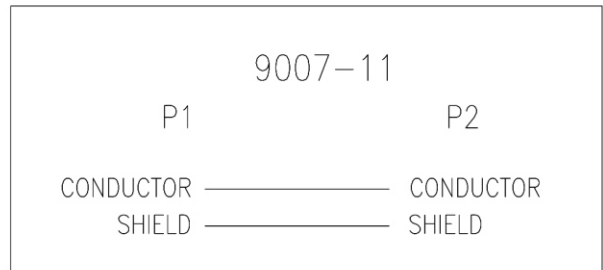

3	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777	
	MOLDED PVC BLACK	H1BF01-0304K09		M304	
2	RG58A/U 21AWG STRANDED CCS, AL/MYLAR AND BRAID(16/3/0.12CCA), OD 5.0mm, JACKET BLACK, DRAWING No. ECAB2101T-177	H5RA10-0304K09	L-30mm	M304	
1	BNC MALE CONNEXOR, GOLD FLASH ON CONTACTS, WHITE INSULATOR(50 OHM)	A1PC05-0612	2	M612	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED		PCCABLES.COM INC	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	XIAO		
DATE	15/JUL/19		
ITEM NO.		UNIT:mm	

CHECKED