
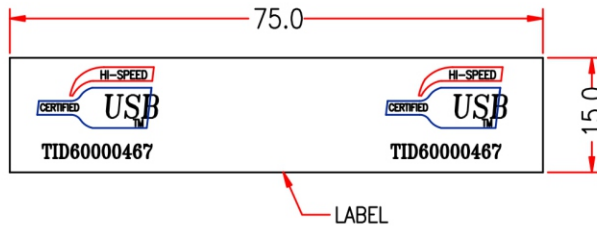


P1: M-942A

P2: M-945A


Customer No:

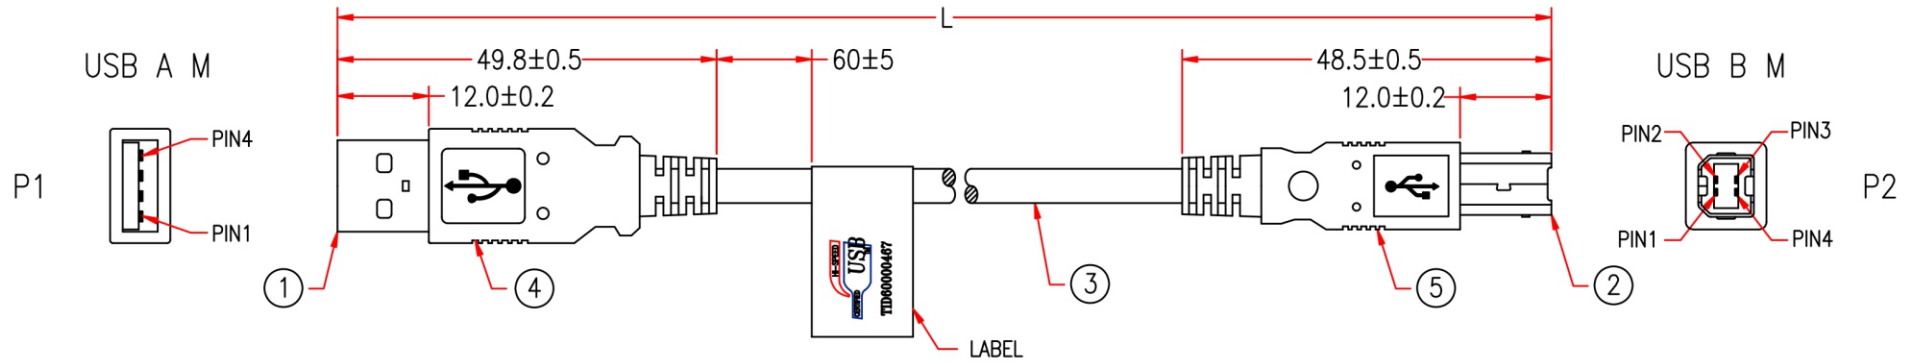

MARKING:

HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1PR+24AWG/2C
 E300060 兪 AWM 2725 80°C 30V VW-1 CSA
 204790 AWM I/II A/B 80°C 30V FT1 MSL

* NOTE: All relevant materials are complied with RoHS directive .

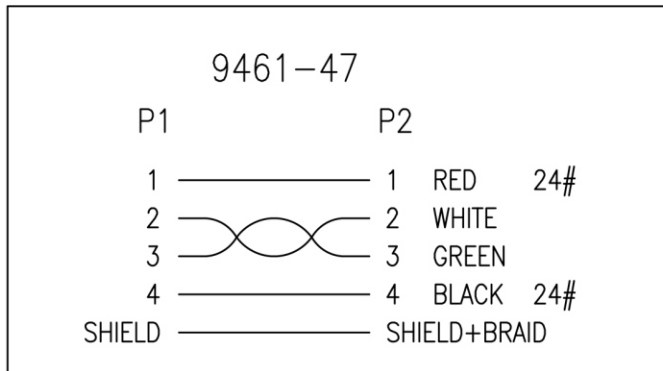

No.	DESCRIPTION	Q'TY	Supplier
5	MOLDED PVC BEIGE		M304
4	MOLDED PVC BEIGE		M304
3	USB 2.0 CABLE, UL 2725 STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID, OD 4.5mm, JACKET BEIGE, DRAWING No.EUAB2801P2402C-422	L-25mm	M304
2	USB B MALE 2.0, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP FOUR PIECES TYPE	1set	M454
1	USB A MALE 2.0, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	1set	M454

APPROVED	CHECKED	DRAWING	DATE	ITEM NO.	UNIT:mm
	HU	XIAO	20/DEC/19	70503	

PCCABLES.COM INC

Cable Length Unless Other Spec.
 Tolerances:
 0 ~200mm ±10mm
 201~1000mm ±20mm
 1001 ~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm± ±40mm