P1: M-942A
P2: M-945A

Customer No:

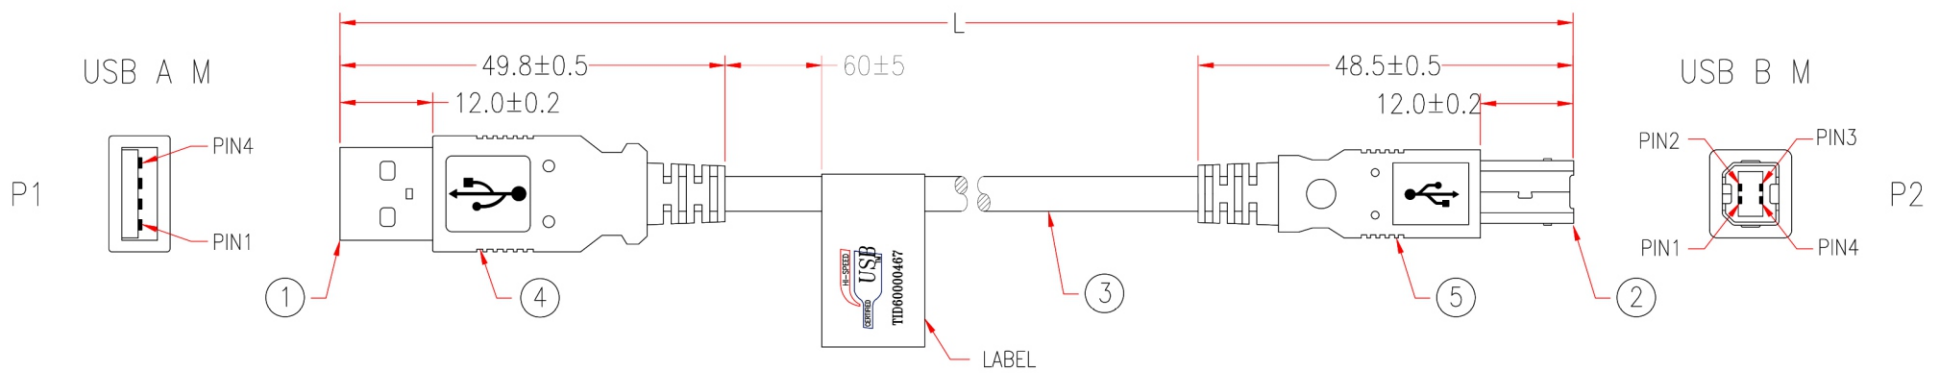

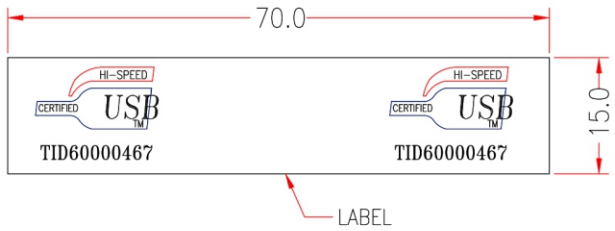

MARKING: HI-SPEED USB Revision 2.0 SHIELDED 28AWG/2C+24AWG/2C
(UL) E305668 TYPE CM 75°C CSA 204790 TYPE CM 75°C MSL

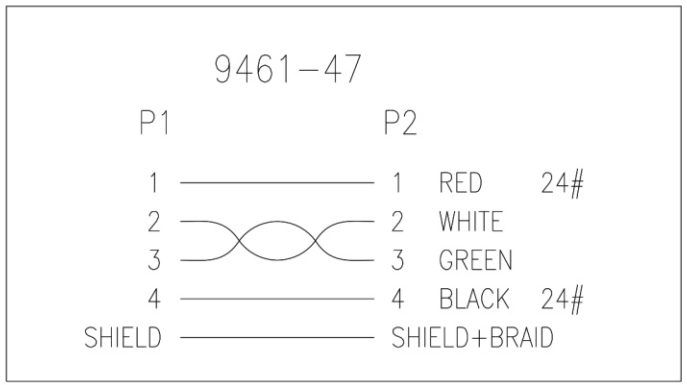

* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION		Q'TY	Supplier
5	MOLDED PVC BEIGE	H1BF01-0304K09		M304
4	MOLDED PVC BEIGE	H1BF01-0304K09		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID 64% SHIELDING WITH DRAIN WIRE,OD 4.5mm,JACKET BEIGE ,DRAWING No.EUAB2801P2402C-139	H5KH29-0304K09	L-20mm	M304
2	USB B MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HB15-0454	1set	M454
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HA22-0454	1set	M454

APPROVED		PCCABLES.COM INC		
CHECKED	HU			
DRAWING	ZHU			
DATE	04/JUN/19	ITEM NO.	70519	UNIT:mm

Cable Length Unless Other Spec. Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

⚠REV.1 2019.06.04 | ADD NOTE. | CHECKED