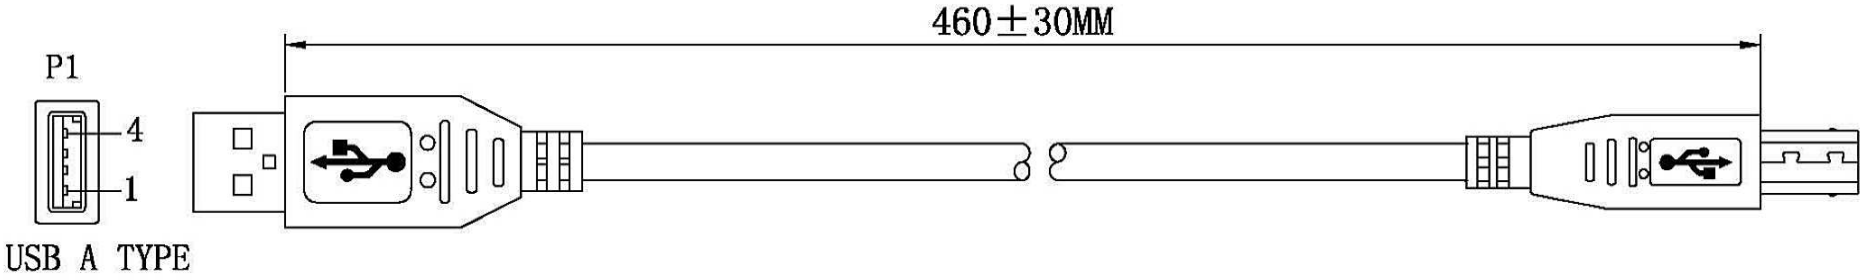

NOTES:

1. MATERIALS
   - 1.1 CABLE: [7/0.12BCX1P+7/0.20BCX2C+AM+7/0.12BC+B(16/3/0.12ALM)+BLACK PVC JACKET. OD=⌀4.5±0.15MM.
     CABLE MARKING:USB 2.0 CABLE FULLY RATED 30V 80℃
   - 1.2 CONNECTOR: P1: USB A TYPE MALE: SOLDER TYPE, BLACK PBT INSULATION, GOLD FLASH CONTACTS, GOLD PLATED SHELL.
   - 1.3 P2: USB B TYPE MALE: SOLDER TYPE, BLACK PBT INSULATION, GOLD FLASH CONTACTS, GOLD PLATED SHELL.
   - 1.4 ALL HOOD: MOLDED BLACK PVC.
2. 100% OPEN AND SHORT TEST.
3. PACKING:1PCS/PE BAG.
4. ALL MATERIAL BE RoHS COMPLIANT.

PIN OUT

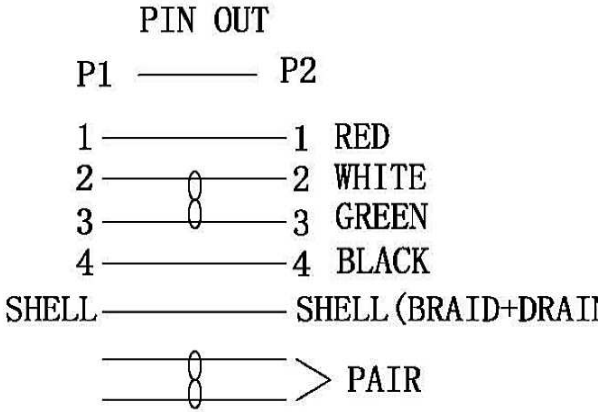

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME: .					ENG:
	UNIT: mm		PRODUCT NO:		CUSTOMER NO: PCC70523		CHECKED:
ANGLE TOLERANCE: X° ±3° .X° ±1°	VERSION: 00	PAGE: 1/1	DRAWING NO: 0757	PRODUCT DESCRIPTION: USB2.0 AM/BM			APPROVED:

NEW ISSUE	2013-06-26
MODIFY DESCRIPTION	DATE