



REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	03/10/99	H.T.

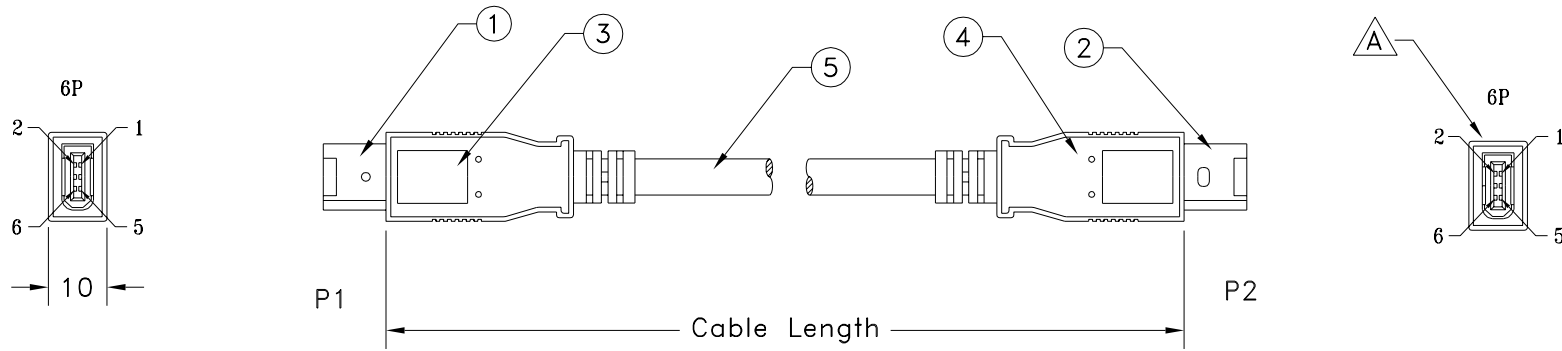

Pin Assignment

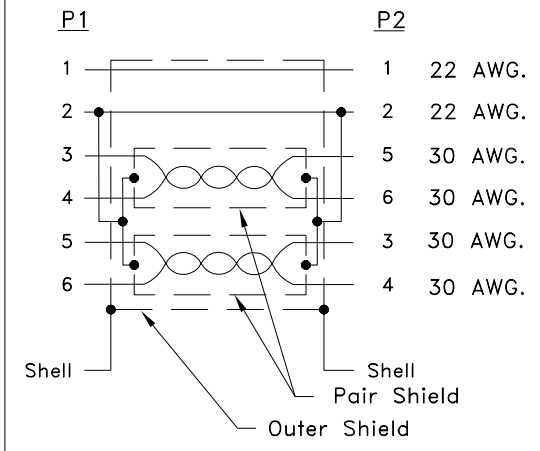

FERRULE: 2.54um MIN TIN-LEAD
 SHELLS: 5.08um MIN TIN-LEAD OVER 2.54um MIN COPPER
 CONTACTS: 0.76u MIN GOLD (0.076um GOLD OVER 0.76um MIN PALLADIUM)

5.	UL20276, (2)22 AWG. Power Lead + (2)30 AWG. Shielded Twisted Pair Signale, Overall Shielded, Black Outer PVC jacket	XX	FT.	UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES. PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY PCCABLES.COM INC.	CUSTOMER	Cable Designed for All Lengths Up to 15 Feet. Has Standard Black Mold. Longer Lengths Require Heavier Power.	
4.	Beige Molded PVC Hood	1	PCS.		R.F.Q. NO.		
3.	Beige Molded PVC Hood	1	PCS.		DRAWN DATE Howie Tseng 03/10/99		
2.	IEEE-1394 6 Pin Male W/Gold Plating Contacts	1	PCS.		CHECKED Jay F Kullmann 01/15/2001		
1.	IEEE-1394 6 Pin Male W/Gold Plating Contacts	1	PCS.		CUSTOMER APPROVAL		
ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT	TITLE IEEE-1394 Cable Assembly (6 POS, Plug/Plug, 1394-1995)	SIZE	PART NO.	REV. A
CABLE ASSEMBLY PARTS LIST				SCALE: NONE	RELEASE DATE: 03/10/99	SHEET: 1 OF 1	