
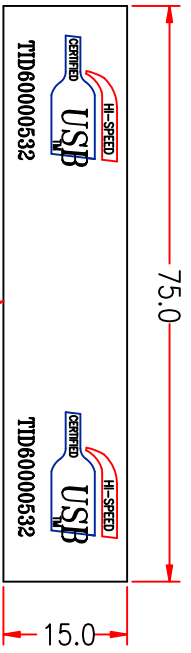


P1: M-942H
 P2: M-971L
 P3: M-300B

Customer No:

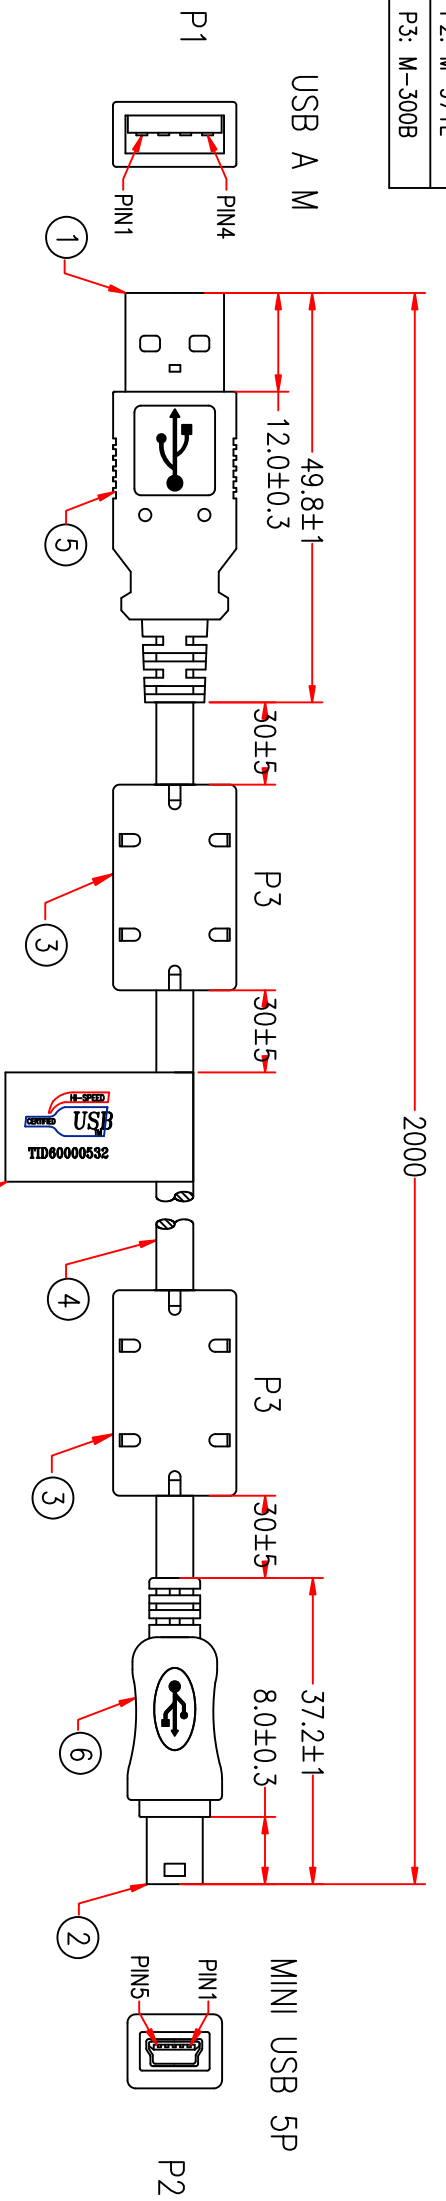

9H81-2	
P1	P2
1	1
2	2
3	3
4	5
SHIELD	SHIELD
	24#
	24#
	24#
	24#

CABLE MARKING:

HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1PR+24AWG/2C
 E300060 兎 AWM 2725 80°C 30V VW-1
 c兎 E300060 AWM I/II A/B 80°C 30V FT1 MSL-VN-

NOTE: All relevant materials are complied with RoHS directive .

6	MOLDED PVC BLACK	H1BF01-030AK09	M304	
5	MOLDED PVC BLACK	H1BF01-030AK09	M304	
4	USB 2.0 CABLE, UL 2725 STYLE 1 TWISDED PAIR 28AWG AND 2C 24AWG, AMA BRAND, OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2402C-422	H5KT03-030AK09	1980mm M304	
3	FERRITE CORE 12*5.6*20mm	A6FA07-1084	2 M1084	
2	MINI USB 5P MALE 2.0, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1HE38-0471	1SET M471	
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRMP TWO PIECES TYPE	A1HA22-0454	1SET M454	
No.	DESCRIPTION		Q'TY	Supplier
APPROVED				
CHECKED	HU			
DESIGNER	XJW			
DRAWING	WEI			
DATE	26/JUL/23	ITEM NO.	PCC-72517	
			PCCABLES.COM Inc	
			UNT: mm	±10mm ±20mm ±25mm ±30mm ±40mm

CHECKED