


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	New Release	05/12/99	H.T.

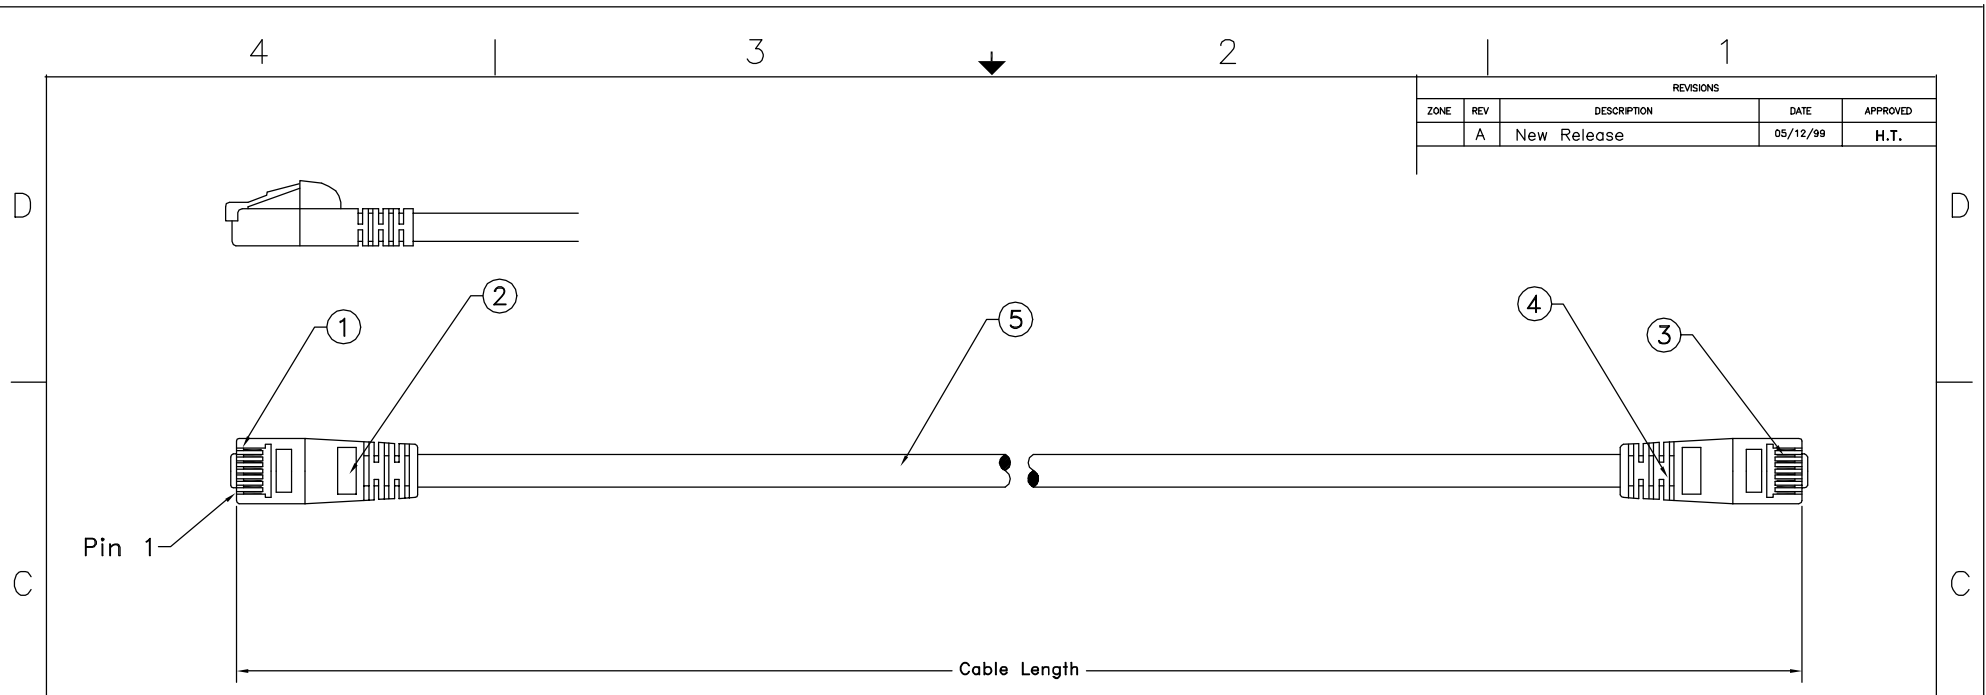

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE.

Pin Assignment		
RJ-45 Plug		RJ-45 Plug
1	↔	1
2	↔	2
3	↔	3
6	↔	6
4	↔	4
5	↔	5
7	↔	7
8	↔	8

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
5.	UTP, 24 AWG., 4 Twisted Pairs, Stranded Bare Copper, UL ETL EIA/TIA-568B Verified Category 5e	XX	FT.
4.	PVC Molded Hood, Hood Color Match Jacket Color	1	PCS.
3.	RJ-45 Plug, w/50u Gold Plating Contacts	1	PCS.
2.	PVC Molded Hood, Hood Color Match Jacket Color	1	PCS.
1.	RJ-45 Plug, w/50u Gold Plating Contacts	1	PCS.



UNLESS OTHERWISE SPECIFIED:
 1. DIMENSION ARE IN INCHS
 2. TOLERANCES: XX.XX ±0.25
 DECIMALES XX.XX ±0.25
 3. DO NOT SCALE DRAWING
 4. REMOVE ALL BURRS AND
 BREAK SHARP EDGES.
 PROPRIETARY DOCUMENT
 THIS DRAWING AND/OR INFORMATION OR
 SUBJECT MATTER CONTAINED HEREIN,
 SHALL NOT BE USED, COPIED OR
 DISSEMINATED IN ANY MANNER, OR FOR
 ANY PURPOSE, OTHER THAN AS
 EXPRESSLY STATED BY

CUSTOMER		PCCABLES.COM INC			
CUSTOMER APPROVAL		TITLE Category 5e Patch Cable, UTP (Category 5 Enhanced, Molded)			
DRAWN Howie Tseng	DATE 05/12/99	SIZE	FSCM NO.	DWG NO.	REV A
CHECKED	SCALE NONE	Release Date: 05/12/99	SHEET 1	OF 1	

D
C
B
A
 FNAME
 REVDATE
 USER

4 | 3 | 2 | 1

↓

↑

4 | 3 | 2 | 1