


P1,P2: M-Y252A


P3: M-SR153A

P4: M-386A

Customer No:

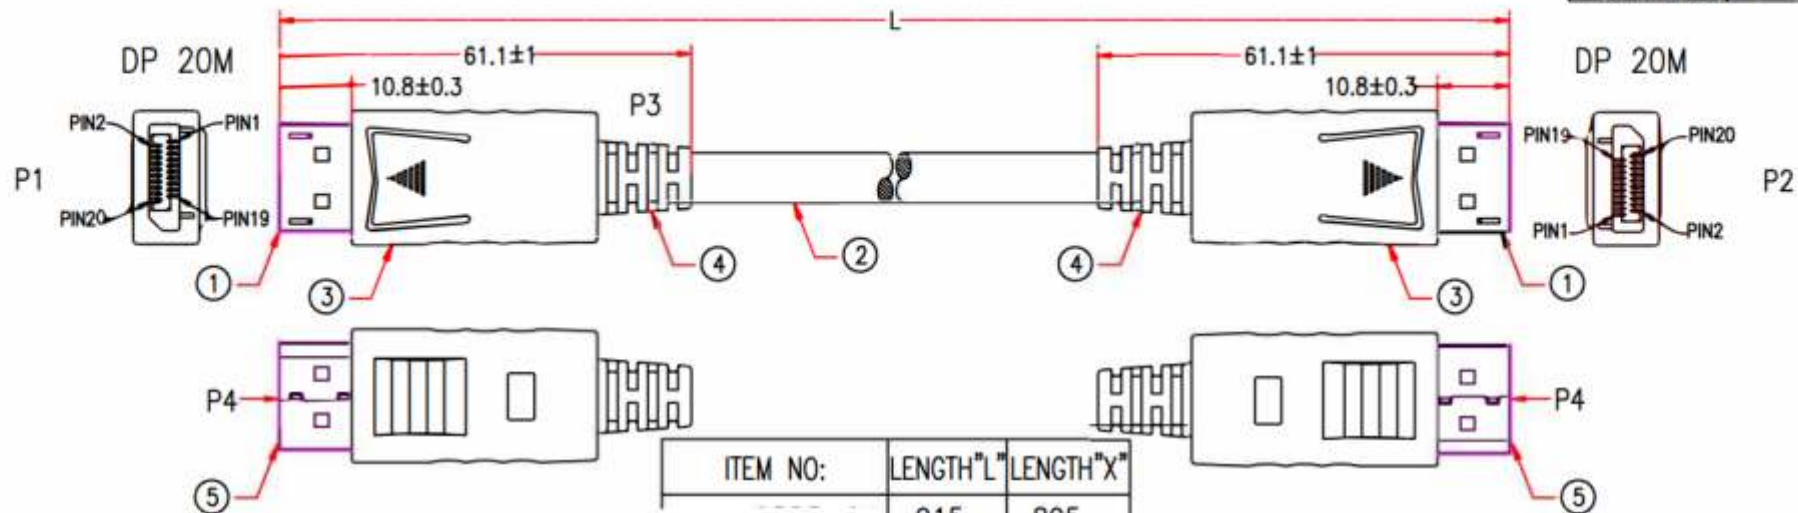

ITEM NO:	LENGTH"L"	LENGTH"X"
1	915	895
2	1830	1810
3	3050	3030
4	4570	4550

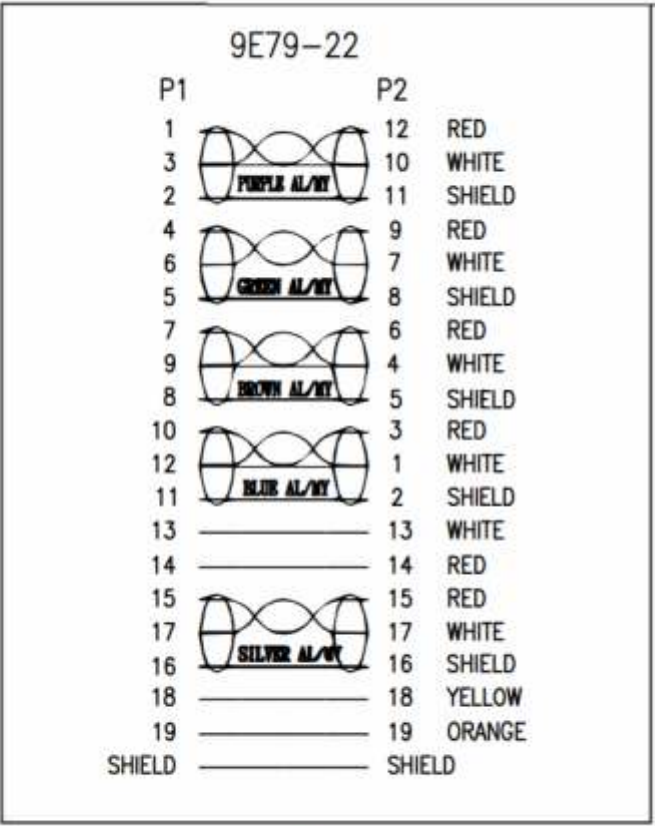

⚠️⚠️⚠️⚠️ MARKING: E300060 兄 AWM 20276 80°C 30V VW-1 c兄 AWM
E300060 /II A 80°C 30V FT1 MSL-VN- DisplayPort Cable

* NTOE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	MOLDED PVC COLOR TRANSPARENT		M304
4	MOLDED PVC BLACK		M304
3	ALUMINUM FOIL 25*60mm	2	M309
	MOLDED PE COLOR TRANSPARENT		M7777
2	DISPLAYPORT 20PIN PLASTIC HOOD BLACK		M636
	UL20276 DISPLAYPORT CABLE (28AWG*1PR+D+AL/MY)*5PCS+28AWG*4C+AL+D+AWA 45% BRAD, OD 7.3mm, JACKET BLACK, DRAWING NO. EAMB2805P2804C-1005	Xmm	M304
1	DISPLAYPORT 20PIN PLUG, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, ASSEMBLY TYPE	2SET	M1172

APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm			
CHECKED	HU				
DESINGER	XJW				
DRAWING	YN				
DATE	29/DEC/23	ITEM NO.		UNIT:mm	

⚠️ REV.4 2023.09.11	MODIFY MARKING	⚠️ REV.5 2023.12.29	MODIFY MARKING & PLUG MANUFACTURER
⚠️ REV.2 2019.12.20	MODIFY CABLE & MARKING	⚠️ REV.3.2021.11.22	MODIFY MARKING
⚠️ REV.1 2019.12.17	MODIFY CABLE & MARKING	CHECKED	