REV.	Description	Date
A		
B		06-2009

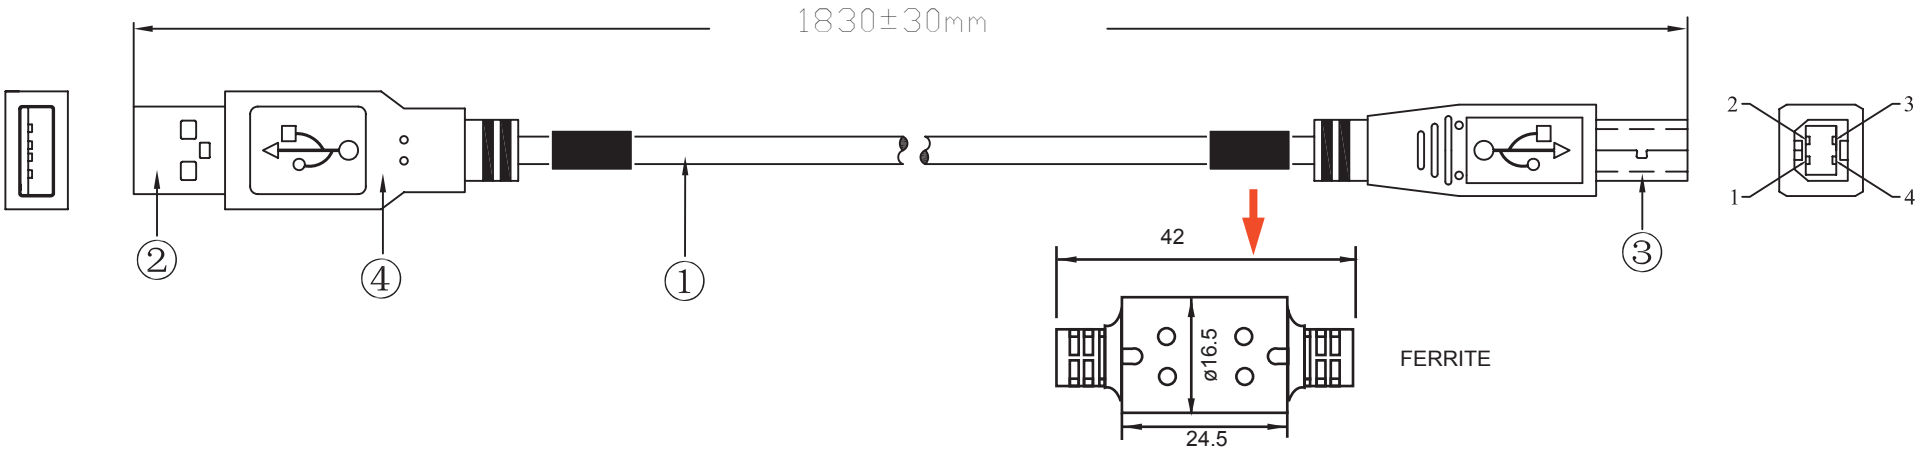

Pin Assignment

USBM(A)	COLOR	USBM(B)
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL	BRAID	SHELL

Cross Section

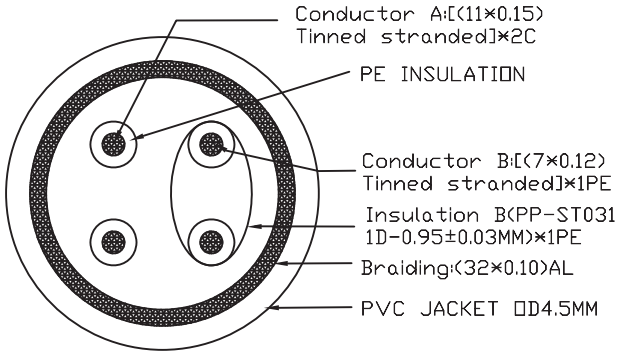

NOTE:

1.ELECTRICAL TEST:
<1>.100% □PEN SHORT & MISS WIRE TEST.
<2>.Min.INSULATION RESISTANCE:Min.DC300V 2Mohm.
<3>.Max.CONDUCTOR RESISTANCE: 10ohm.

Part No.	Cable Length
C161-01-AmBm	1.8M

NO.	Specifications
4	MOLDED: 45P PVC BLACK
3	CONNECTOR:USB2.0 B MALE SOLDER TYPE(THREE-PIECE), INSULATOR:WHITE, PIN:G/F, SHELL:GOLD PLATED
2	CONNECTOR:USB2.0 A MALE SOLDER TYPE MALE(THREE-PIECE), INSULATOR:WHITE, PIN:G/F, SHELL:GOLD PLATED
1	CABLE:28AWG/1P(7/0.12BC)×24AWG/2c(11/0.15BC)+AEB48, □UTER JACKET: PVC BLACK, □D:4.5MM
	Bom list

Item Number	C161-01-AmBm Cable			Drawer	Cheryl Cao
Description	USB2.0 AM/BM			Checked	
Material		Scale	1:1	Approved	
	A	Unit	MM		
Drawing No:					
Remake	ROHS Compliant				